



ECClos®-K

Conveyor system closure designed as a robust slider for overhead conveyor systems


Product description

Combination of gate and collar for complex conveyor systemsECClos-K is the robust and safe gate solution for circular conveyors and Power&Free Systems. The system uses intumescent collars to safely shield continuous circular conveyors and is also suitable for the passage of several conveyor lines. The damper in sandwich design features is completely enclosed by a sheet metal casing and thus very sturdy. Especially convenient for transport and easy installation: ECClos-K is delivered in compact segments that are easy to assemble.

Type	Fire protection closure as part of track-bound conveyor systems	Closing cycles	C2
Proof of usability	Application for ETB pending	Re-opening	electromotive (standard)
Closing direction	from right to left • from the bottom to the top • from left to right	Conveyor system	Circular conveyor • Power & Free systems • Continuous circular conveyor • Continuous overhead conveyor
Fire resistance	El. 120 • tested according to DIN EN 1366-7 • classified according to DIN EN 13501-2		

Constructive system design (Floor)

Required wall quality		Technical feasibility	
Masonry	acc. to DIN 1053-1	LH	500 mm - 4000 mm
Concrete	acc. to DIN 1045	LW	500 mm - 6700 mm
Aerated concrete	acc. to DIN 4165		
Wall thickness	$d \geq 200 \text{ mm}$		
Lightweight stud partition	acc. to DIN 4102		

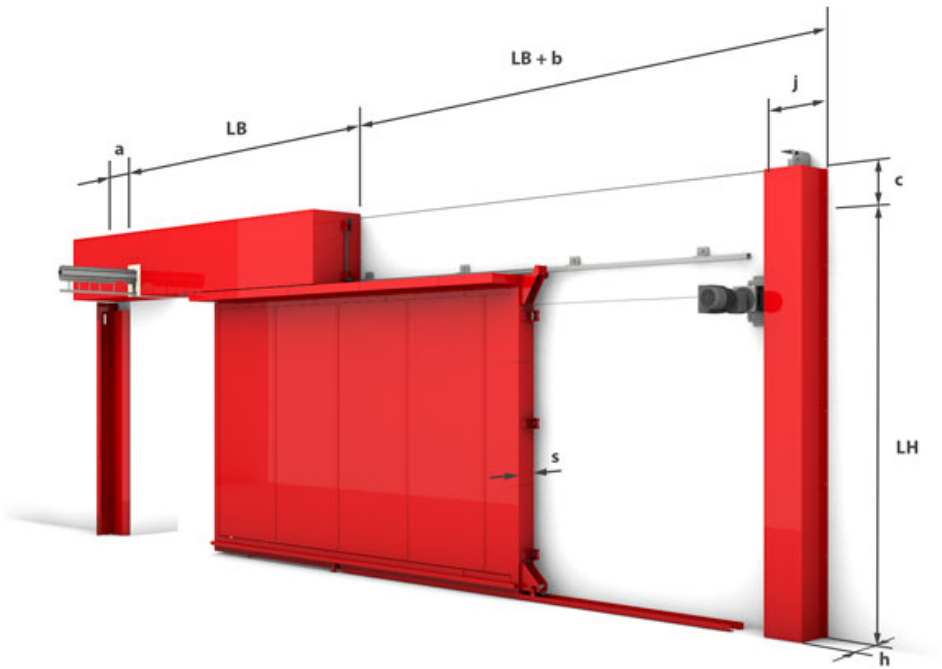

a = 282 **b** = 930 **c** = 150 **j** = 300 **s** = 122